LPS-Lasersysteme Siegmund Ruff Haidschwärze 18 72131 Ofterdingen
Phone: +49 7473 271177 www.lps-laser.com info@lps-laser.de Germany

TH912

Single 12“ Loudspeaker

Features
- 2-Way full range cabinet
- Single 12“ featuring efficient heat dissipation woofer
- Superalloy compression driver voice coil for better heat dissipation
- 60° x 40° dispersion with a rotatable horn
- Strong-wedge bonded cabinet structure to avoid resonances

Specifications

Frequency Response	50 Hz-18 kHz (±3 dB) 40 Hz - 20 kHz (-10 dB)
Dispersion (H x V)	60° x 40° (Rotatable)
Crossover	1.3 kHz
Sensitivity (1 W / 1 m)	102 dB
SPL (1 m)	126 dB (Continuous) 132 dB (Peak)
Power Rating (AES)	400W
Nominal Impedance	8 Ω
LF Driver	1 x 12" Ferrite I 75 mm Voice Coil
HF Driver	1 x 1.4" Ferrite / 75 mm Voice Coil
Connectors	2 x Neutrik® NL4MP (Full: 1+1-)
Fittings	12 x M10 Flying Points 1 x Pole-mount socket
Dimensions (W x H x D)	378 x 365 x 650 mm
NetWeight	29 kg

TH915

Single 15“ Loudspeaker

Features
- 2-Way full range cabinet
- Single 15“ featuring efficient heat dissipation woofer
- Superalloy compression driver voice coil for better heat dissipation
- 60° x 40° dispersion with a rotatable horn
- Streng wedge bonded cabinet structure to avoid resonances

Specifications

Frequency Response	50 Hz-18 kHz (±3 dB) 40 Hz - 20 kHz (-10 dB)
Dispersion (H x V)	60° x 40° (Rotatable)
Crossover	1.3 kHz
Sensitivity (1 W / 1 m)	97+ dB
SPL (1 m)	123+ dB (Continuous) 129 dB (Peak)
Power Rating (AES)	450W
Nominal Impedance	8 Ω
LF Driver	1 x 12" Ferrite I 75 mm Voice Coil
HF Driver	1 x 1.4" Ferrite / 75 mm Voice Coil
Connectors	2 x Neutrik® NL4MP (Full: 1+1-)
Fittings	12 x M10 Flying Points 1 x Pole-mount socket
Dimensions (W x H x D)	378 x 365 x 650 mm
NetWeight	29 kg

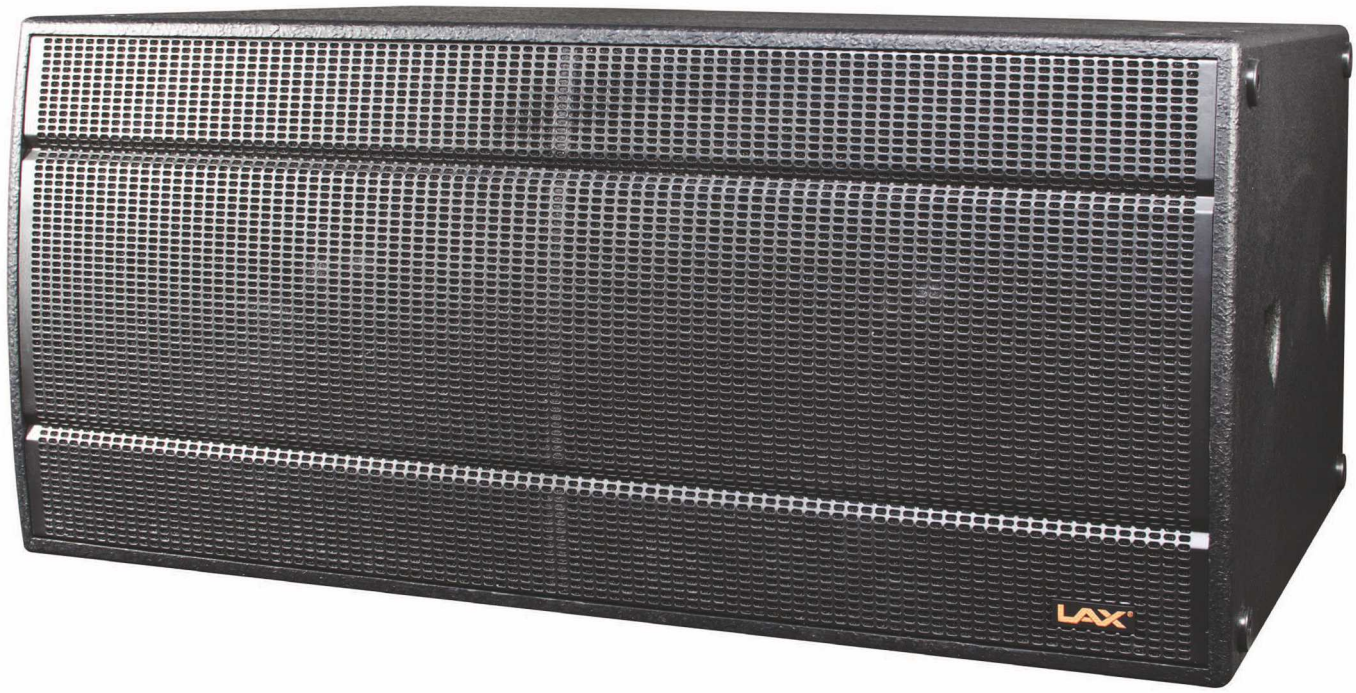

TH928B

Dual 18“ Subwoofer

Features

- Direct radiating subwoofer enclosure
- Double 18“ featuring efficient heat dissipation woofer
- Individual enclosure for each driver to improve output control
- Reinforced V-Slot grille
- Suitable sub bass extension for TH900 loudspeakers

Specifications

Frequency Response	38 Hz -400 Hz
Sensitivity (1 W / 1 m)	106 dB
SPL (1 m)	138 dB (Continuous)144 dB (Peak)
Power Rating (AES)	1600W
Nominal Impedance	4 Ω
LF Drivers	2 x 18" Ferrite/ 100 mm Voice Coil
Connectors	2 x Neutrik® NL4MP (LF: 2+2-)
Dimensions (W x D x H)	1186 x 850 x 544 mm
NetWeight	85 kg

EXCLUSIVE DEALER LAX
LPS-Lasersysteme Siegmund Ruff Haidschwärze 18 72131 Ofterdingen
Phone: +49 7473 271177 www.lps-laser.com info@lps-laser.de Germany